

# Vivato

Mike Scullin VP, Business Development and Government Affairs

miceOriente.mef - g-wairato.cof

Wi-Fi Switching: Next Generation Wi-Fi Infrastructure

Creating the New <u>Wi-Fi Physics</u>

Delivering the New <u>Wi-Fi Economics</u>



# Vivato's Mission

- > Wi-Fi Switch Manufacturer
  - Industry standard Wi-Fi wireless network infrastructure for IEEE 802.11b/a/g ...
- > Scale Wi-Fi to the enterprise (and beyond)
  - Support standard Wi-Fi client hardware and software
  - Deliver high QoS client performance to 54 Mbps
  - Floor/building/campus/metro coverage
    - > Outdoor service to 4 km
    - >Indoor service to 1 km
  - · Capacity scales to a gigabit
  - Enterprise class security and management
- > Lowest cost of deployment and ownership
  - Universal deployment of Wi-Fi in client platforms



# A Brief History

- > Company founded 12/00
- > Technology demo 9/01
- > Launched company 11/02
- > Received FCC certification for Wi-Fi Switch prototype 12/02
- > Shipped beta units 2/03
- > Vivato 2.4 GHz Indoor Wi-Fi Switch announced 2/03 at Demo 2003
- > Intel investment/partnership 2/2003
- > Vivato 2.4 GHz Outdoor W-Fi Switch announced at CTIA 3/2003
- > GA Shipments 5/2003




# Wi-Fi Poised for Success The New Ethernet

- >802.11b is a stealth success -> like 10BaseT
  - Departmental networks like 10BaseT Ethernet
  - Faster platform adoption than Ethernet
    - >20% laptop penetration today
    - > Intel Centrino drives to >70% penetration
- > 802.11a/g will catalyze the market -> 100BaseT
  - · Challenge of coverage vs. speed
  - IT begins to centralize with 802.11b -> g/a
- > Challenges of scale -> hubs/bridges not enough!
  - Micro-cellular limitations
  - Security, Manageability, Configuration, Coverage, Capacity, Cost



# The Challenges of Scale

- > Brute force micro-cellular tough to scale
  - Like Enet hubs and bridges
  - Lack of coverage
    - > Higher speed often means shorter distance
  - Lack of capacity
    - > Interference, unpredictability of speed
  - · Lack of manageability
  - Cost increasingly dominated by labor and infrastructure not infrastructure electronics
  - Reality check of radio interference and range
- > Time to reexamine assumptions
  - Ethernet switching ubiquitous today
  - Asymmetric infrastructure
    - > Move labor cost to Moore's law cost
  - Wi-Fi Switching needed!

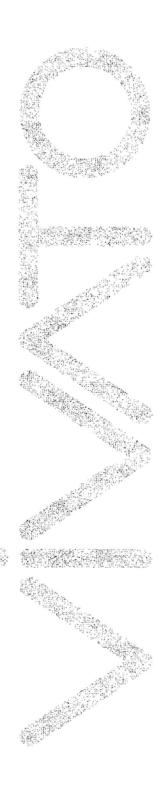

# Willer E W E W W W H E R E

# Wi-Fi Switching


- > Asymmetric Infrastructure
  - Replace infrastructure labor cost with Moore's Law cost
- > Existing clients
  - Backward compatible to current Wi-Fi clients
  - Platform for future clients
    - > Increased features: speed, QoS, management
- > Increased coverage
  - Decreased cost of deployment
  - Allows increased speed
    - > 802.11b->802.11a
  - New markets: hot zone >>> "first mile"
- > Increased capacity
  - Multiple simultaneous clients
  - Space, frequency and time multiplexing
- > Management and security
  - · Best of class



# Creating the New Wi-Fi Physics

- > Planar phased array antenna
  - · enables multiple shaped packet beams
- > Narrow packet beams transmit and receive
  - Narrow beams with high EIRP transmission
  - Large aperture for increased sensitivity reception
  - · Power beamed only where it is needed
- > Dramatically higher range
  - Up to 4 kilometers outdoors with a conventional Wi-Fi client.
  - Up to 1 kilometer to an indoor Wi-Fi client.
- > Higher overall capacity
  - Reduced interference
  - Packet beams deliver capacity directly to clients rather than floor space
  - Space, time and channel multiplexing to drive parallel capacity
- > Standard IEEE 802.11 b/a/g client NIC h/w and s/w
- > Integrated packaging
  - "Plasma TV" with gigE and power
  - Replaces a "Sea of APs, lots of wire, gigE switch, security controller and most of the labor - all rolled up"




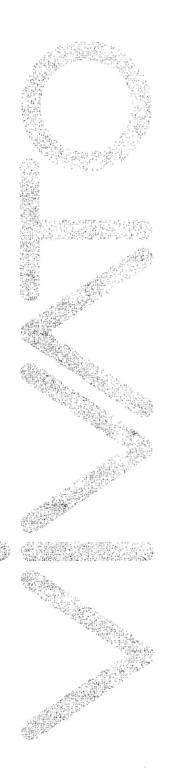

# Vivato Wi-Fi Switch

### Enterprise Switch Functionality

- > Fully integrated package
  - · Phased array antenna
  - Layer 2 and 3 packet switch
    - > IEEE 802.11 b/g/a
    - > VLAN, VPN, QoS, security, mesh routing, roaming, authentication
    - > Wireless or Ethernet backhaul
- > Simultaneous packet beams
  - · High throughput
    - > 33 Mb/s 802.11b
    - > 162 Mb/s 802.11g
    - > 270 Mb/s 802.11a
  - 2.4 GHz or 5 GHz
  - · 25 dBi gain
- > Hundreds of simultaneous clients
- > Integrated network management
  - · Support for legacy APs
  - Rogue AP/client detection and mapping



### > Packaging

- Indoor, outdoor, building side, rooftop, tower
- > Switch has 100 degree FOV
- Multiple panels per switch to scale reliability, capacity



# Wi-fi EVERVWHERE

# Target Customers

# > Enterprises


- Lowest cost, highest performance Wi-Fi deployments
  - > Lowest cost of deployment and ownership
  - > Fewer, higher performance, greater range switches
  - >802.11b -> 802.11a/g transition


# > Service Providers

- Gb/s at the end of the fiber
  - > Low cost of incremental deployment
- Public Access Wi-Fi LANs
  - > airports, hotels, downtowns, business parks, residential neighborhoods


# > Wi-Fi Carrier


- Wi-Fi Packet Tone everywhere
- Low cost ubiquitous broadband data service

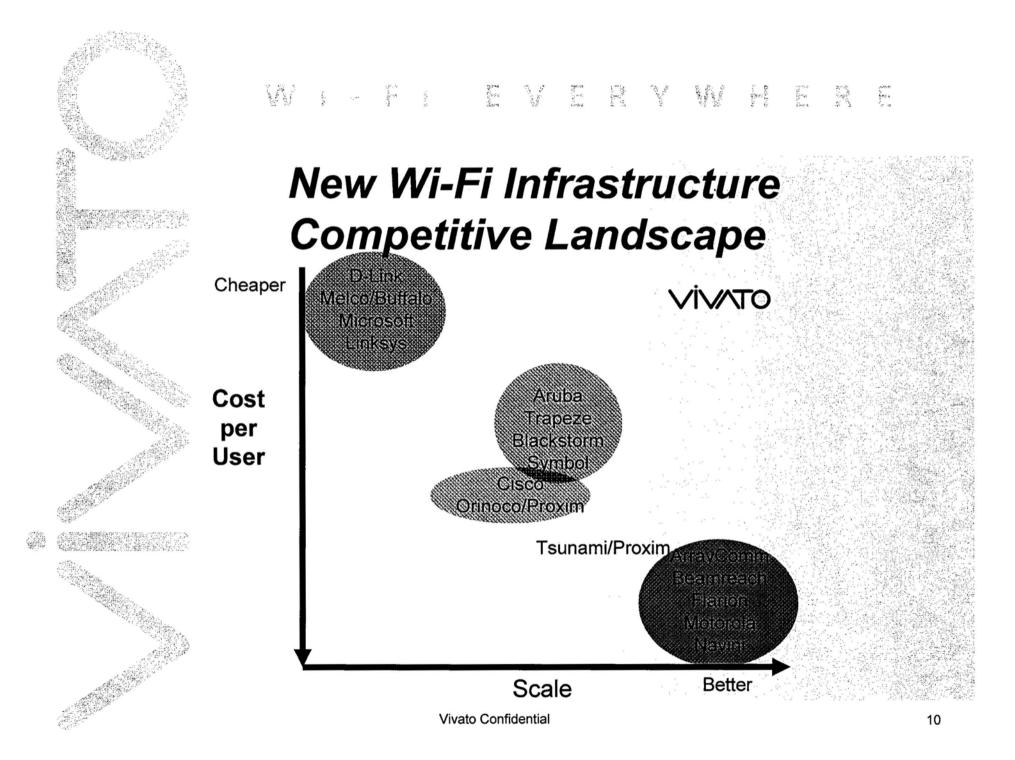

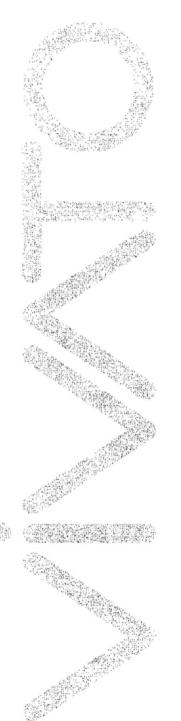

# Vivato Wi-Fi Switch Scaled Deployment Options

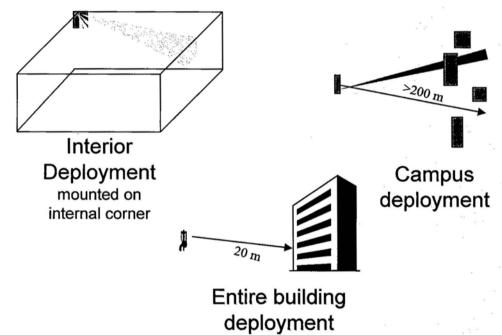

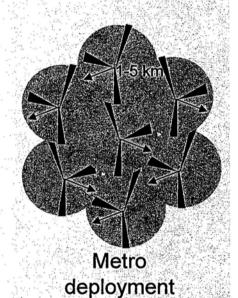

> Most cost effective Wi-Fi solution for single floors, entire buildings, the whole campus, and beyond





# Vivato's New Wi-Fi Economics Enterprise Deployment


- > Lowest Cost of Coverage by a factor of 2 to 5
- > Scalable Capacity
  - · Capacity dynamically follows users
    - > Bandwidth follows the clients
    - > Floor, building and campus coverage with a single, upgradeable uni




- · Manage one network element instead of many
  - > Vivato Wi-Fi switch is the edge LAN switch, Access Gateway, Zone controller and many APs integrated into a single device
  - > Reduced System Complexity
  - > Want redundancy? Buy two.
- Comprehensive, standards based management tools
- Manage legacy APs for security and configuration
- > Security
  - CHAP, MS-CHAP V2, MS MPPE, IPSEC, 802.1x+EAP
  - Uses existing MS clients (XP, 2000, NT, etc.)
- > Maintainability
  - Single point for SW/FW upgrades, network configuration








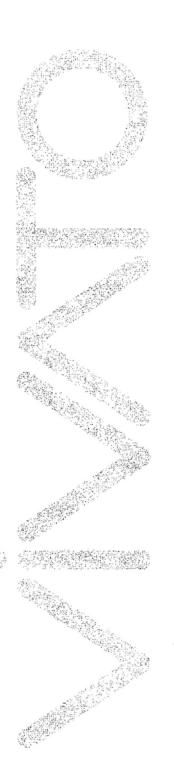

# WILLEYERYWHERE

Vivato's New Wi-Fi Economics
Campus and Wide-Area Deployment

- > Lowest Cost of Coverage by a factor of 5
- > Scalable Capacity
  - Placed where it is needed
    - > Bandwidth follows the clients
    - > Floor, building and campus coverage with a single, upgradeable unit
- > Manageability
  - Manage one network element instead of many
  - Comprehensive, standards based management tools
  - Manage legacy APs for security and configuration
- > Security
  - CHAP, MS-CHAP V2, MS MPPE, IPSEC, 802.1x+EAP
  - Uses existing MS clients (XP, 2000, NT, etc.)
- > Maintainability
  - Single point for SW/FW upgrades, network configuration





# Vivato's Directed Focus

- > Founder of a new category: Wi-Fi Switching
- > Disruptive technology
  - · The New Wi-Fi Physics
  - Low-cost Wi-Fi clients widely integrated into platforms
  - High QoS client performance to 54 Mb/s
  - · Scale capacity to gigabit/s
  - Scale coverage: Enterprise -> Campus -> Metro
  - · Integrated enterprise class management and security
  - · Distinctively valuable intellectual property
- > Disruptive economics
  - Up to 1/5 the CAPEX of alternatives
  - Vastly improved OPEX through integrated function
- > Strong customer demand
  - Large enterprise
  - Public LAN
- > Operational excellence
- > Sound financing
- > The team to deliver on the promise



Property received

7 9 6

Vivato Wi-Fi Switches increase range and

reduce interference.




# The Vivato Wi-Fi Switch: Multiple Point-to-Point Links

802.11 Client

Wi-Fi Switch



802.11 Client

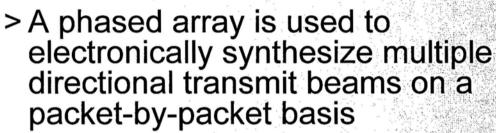

- Client location is detected automatically
- An RF beam is aimed at each client based on its angular location on a packet-by-packet basis
- Antenna pattern is shaped to minimize interference
- > Ubiquitous clients transmit omnidirectionally using the lower power point-to-multipoint rules.
  - Standard WLAN cards



802.11 Client

802.11 Client

Vivato Confidential


16



# EIRP and Omni Antennas

### The Fundamental Issue: EIRP Affects Range

and interference levels at a distance

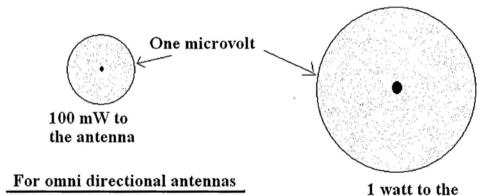

antenna

For Directive Antennas?



### EIRP Affects Range for Directive Antennas Azimuth patterns 10 mW to the 100 mW to the 6 $dBi \leftarrow 1$ microvolt antenna antenna 0 dBi 100 mW to the 10 dBi antenna 1 microvolt Omni has Area is the same Three times higher area than beamed 100 mW to the 20 dBi antenna

Vivato Confidential

18

1 microvolt




# WITH EVEN Y WHERE

# Area of Coverage is important

- > An omni antenna covers an area approximately three times greater than a narrow beamwidth antenna, for the same power to the antenna.
- > With scattering, "fourth power propagation loss" reduces Switch (narrow beamwidth) coverage area further.
- > Importantly, 1 W omnidirectional APs have much larger coverage area than 100 mW narrow beam Wi-Fi Switches with high gain antennas.



# Wi-Fi EVERYWHERE

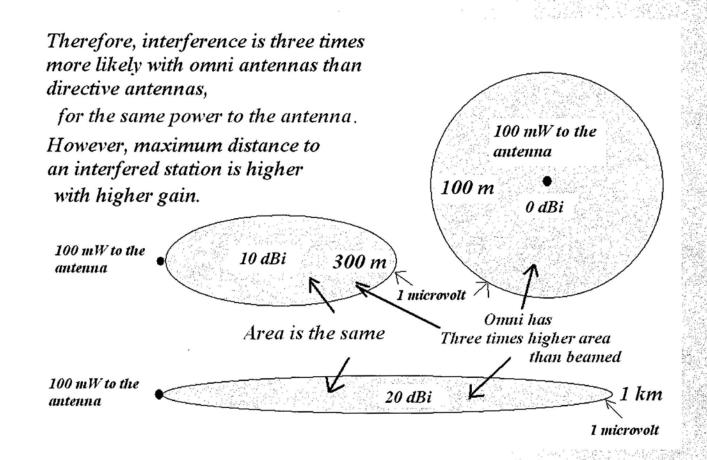





# Maximum distance to interfered stations?

>For example, assume interference is measured 1 km away from the edge of coverage.

>How does a Wi-Fi Switch compare to a "Sea of Access points"?

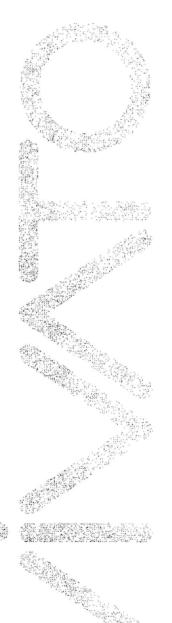

# 32 APs Interfere Constantly

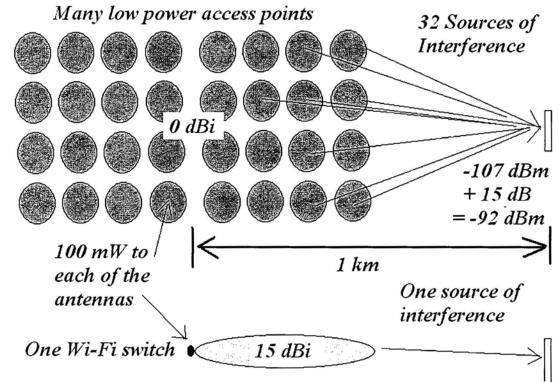

Conclusion: Switch and 32 APs produce the same level of interference. -92 dBm



# A "Sea of APs" vs a Wi-Fi Switch

- > Two scenarios for deployment:
  - · A "Sea of Access Points"
  - One Wi-Fi Switch
- If interference is measured 1 km away from the edge of coverage, the sea of APs will add their power (always on, unless quiet due to interference, in 360°).
- > The Wi-Fi Switch will direct energy with narrow beams and rarely interfere (energy would have to be directed along bearing to radar).
- > The Wi-Fi Switch, with its higher directivity/gain will detect and avoid radar much farther away than any AP.



### W:-F: EVERYWHERE

# Advantages of Wi-Fi Switches

- > Narrow beamwidth spatially filters energy.
- > High Wi-Fi Switch gain allows distant RADARs to be detected.
- > Dynamic Frequency Selection can be done directionally.
- > Transmit Power Control can be done directionally.
- > Switches continue to work gracefully without interfering. Omni systems may entirely stop.
- > Total power to the Switch antenna is approximately equal to a client station's power (~ 150 mW), and can be controlled (tx power) to just include the zone of coverage.



# In Summary

- > Proliferation of omni radiators (APs) causes tremendous interference (not optimal).
- > Remedy: Direct the energy only where (narrow beam) needed, and transmit only when needed using DFS and tx power control techniques.
- > If there are clients, then there will be omnidirected energy. APs cause omni interference (more power = more interference).
- > Thus, if high gain, narrow beamwidth antennas (Wi-Fi Switches) are foreclosed, the likelihood of the "sea of APs" is heightened; a sub-optimal scenario for interference mitigation, and debilitating to the future of Wi-Fi.





# VERYWHER П

# Vivato

Wi-Fi Switches

Scaling Wi-Fi for Success